


A ram stands in service of the spreader and cutters, for when you need to create more room and have the same spreading capacity over a long area. That is why you want not only a performance ram but one that works in cooperation with your main tools. Due to EWOtechnology the rams are extremely easy to carry and position.

RAM V SERIES

VERSATILE AND COMPACT

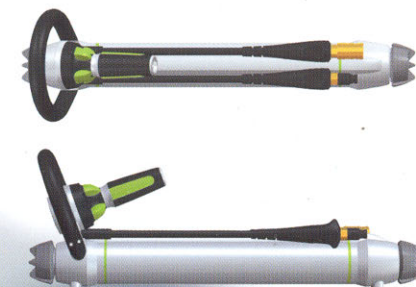

PSI™
ULTIMATE

EWO™
TECHNOLOGY



1 **Quick connectors:** are able to connect fast and easy. Automatic locking and flat face design prevent sand going in. 2 **Fixed 360° handle:** enable the user to have balance in every position and change positions fast. 3 **Duo control:** handle for both thumb and/or twist control in one. 4 **Angled grip handle:** designed with EWOtechnology the ram is very easy to position and carry. 5 **Grip Jaws:** center the load in the middle of the jaw creating optimum grip and controlled spreading action

P.T.H."COMPART" – Z.Dziembowski
Centrum Sprzetu Ratowniczego : 44-100 Gliwice , ul.Gen.J.Sowinskiego 5
Tel./ Fax 0-32 2 380 680, 0-32 2 380 436 , e-mail: compart@ratownictwo.com.pl


RESQTEC™

RAM V2



RAM V2 DIMENSIONS

Length	19	inches
Width	8 1/16	inches
Height	9 15/16	inches
Operational weight	26.9	lb
Nominal pressure	5000	Ult. PSI
Extended length	31 1/8	inches
Max. stroke	12 1/16	inches
Max.spreading force	13 US ton / 25,000	lbs

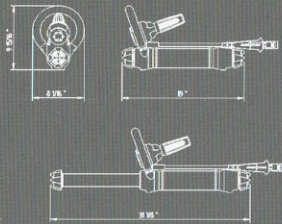


RAM V4



RAM V4 DIMENSIONS

Length	28 1/16	inches
Width	8 1/16	inches
Height	9 15/16	inches
Operational weight	35.1	lb
Nominal pressure	5000	Ult. PSI
Extended length	49 3/16	inches
Max. stroke	21 1/8	inches
Max.spreading force	13 US ton / 25,000	lbs

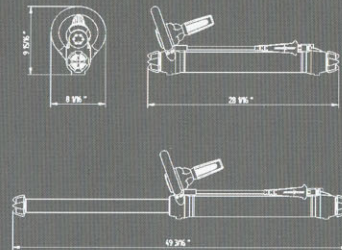


RAM V6





RAM V6 DIMENSIONS

Length	41 7/8	inches
Width	8 1/16	inches
Height	9 15/16	inches
Operational weight	43.1	lb
Nominal pressure	5000	Ult. PSI
Extended length	63	inches
Max. stroke	21 1/8	inches
Max.spreading force	13 US ton / 25,000	lbs

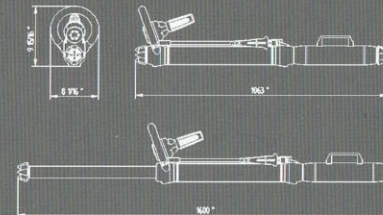

MINI 1X1 STO DIMENSIONS

Length	14 15/16	inches
Width	13 3/8	inches
Height	15 3/16	inches
Operational weight	32.6	lb
Nominal pressure	5000	Ult. PSI
Engine	Honda GXH50	
Power supply	2.5 hp	
Pump	2-stage radial piston	
Oil capacity	0.58	gal
First stage; flow	0-1450 PSI; 1.1	gal/min
Scnd. stage; flow	1450-5000 PSI; 0.3	gal/min
Running time ca.	240	min

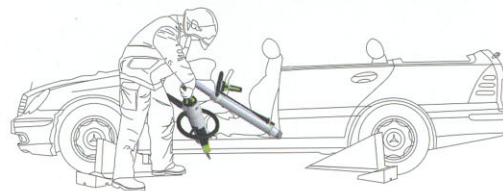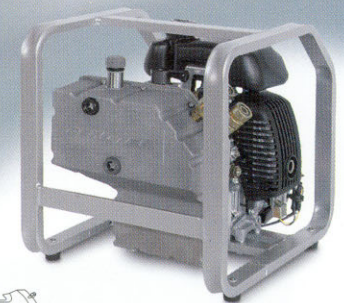

P.T.H."COMPART" – Z.Dziembowski

Centrum Sprzetu Ratowniczego : 44-100 Gliwice , ul.Gen.J.Sowinskiego 5

Tel./ Fax 0-32 2 380 680, 0-32 2 380 436 , e-mail: compart@ratownictwo.com.pl

RAM V SERIES, VERSATILE AND COMPACT