

CUTTER

G6

The Cutter G-series are a rescuers' favorite. Some say it is because of the shear power it produces, while others say it is because of handling and controlled cutting motion. We know it is a combination of factors. Power only makes sense if the tool is able to translate all factors into a controlled and effective cut regardless of the structures you are trying to cut - And that is exactly what the G-series cutters do. They have the widest range of cutting capabilities, from cutting round bars to the toughest of car constructions. Designed with EWOTECHNOLOGY the weight of the tool does not reveal its true identity: the most powerful and highest performing cutter on the market.

Features:

- Ultimate Pressure
- EWOTECHNOLOGY
- CCC capacity (Complex Car Constructions)

Facts:

- Best power to weight ratio
- Lightest in its class
- Most powerful medium-duty cutter
- Highest safety factors on critical parts

EWOTECHNOLOGY
PRESSURE™
ULTIMATE

G6 cutter: most powerful, lightest and safest cutter in its class

Advanced blade design: gives you control over the cutting action from round bar to complex car constructions

Real protective covering: for all dangerous turning parts

Fixed 360° handle: enables the user to have balance in every position and change positions quickly

Flat bolt design: lowers the insertion height of the tool, enabling you to reach confined spaces



Quick connectors: easy and fast to connect. Automatic locking and flat-face design prevent sand and dirt from getting in the couplers. A rescuers' favorite

Duo control: handle for both thumb and/or twist control in one. Ergonomically designed for best control in every position. No risk to the user as no hydraulics go through the handle.


360° turning tail-hoses: so they never interfere with operation and don't take up space when stored. Withstand 8x the working pressure, making them the safest available

CCC CAPACITY
Capacity tested for ComplexCarConstructions

CUTTER G-series

Technical specifications G6

Model	G6 cutter
Nominal pressure	UltimatePSI™ / 5000 PSI / 350 Bar
Dimensions (LxWxH)	31 3/16" x 11 1/2" x 11 3/16" // 792 x 292 x 284mm
Operational weight	38.9 lbs / 17.7 kg
Max. cutting opening	8 3/8" / 212mm
Max. cutting force	281,140 lbs / 140.6 US tones / 1251 kN / 127.5 ton
EN 13204	Compliant
NFPA 1936	Compliant

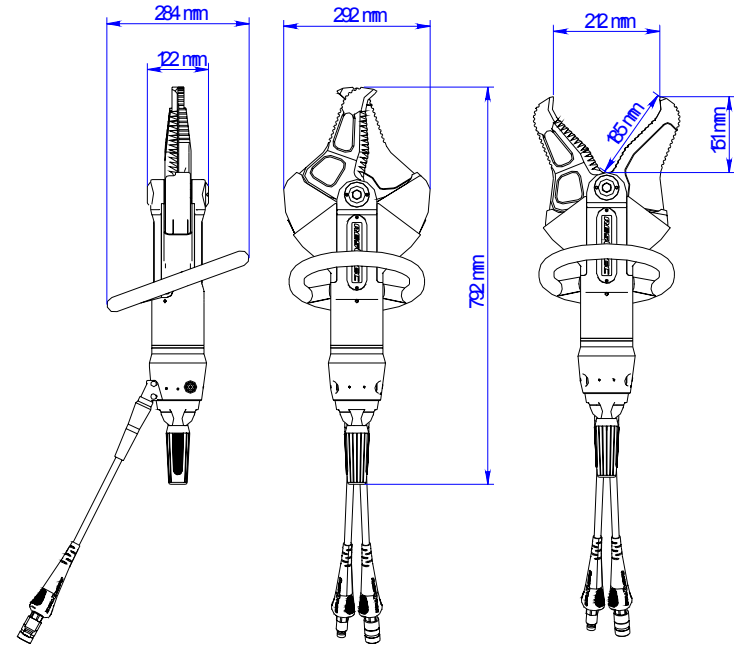

For questions or additional information please e-mail to info@resqtec.pl / info@ratownictwo.com.pl

D5003K00

RESQTEC®

RESQTEC® is a registered trademark

© RESQTEC® 2007
Technical modifications reserved

P.T.H."COMPART" - Z.Dziembowski, Centrum Sprzetu Ratowniczego
PL 44-121 Gliwice , ul. Gen.J.Sowinskiego 5 (IMN)
Tel./ Fax +48 (0) 32 - 2 380 680 , 2 380 436 , e-mail : info@resqtec.pl
www.resqtec.pl / www.ratownictwo.com.pl / www.998.info.pl