


LP Bags

RESQTEC is a major manufacturer of both low and high pressure bags.

Low Pressure (LP) Bags are mostly used to lift objects which can withstand only a minimum load to its structure. For this reason their lifting capacity is limited. The LP Bags are made of nylon with a heavy duty neoprene coating. The sides of the bags are bright yellow, by which they are much more visible, even at night. To ensure safety, each bag has its own safety (relief) valve built into the side. So you can easily disconnect the bag from the delivery hose. Seven internal restraint webs provide the best stability, when under load as well as free-standing. The one-way flow connector has been integrated to a screwable PVC in/deflation port, which allows fast deflation.

Low Pressure bags series

The Low Pressure bags are manufactured with the highest quality materials and are Kevlar reinforced

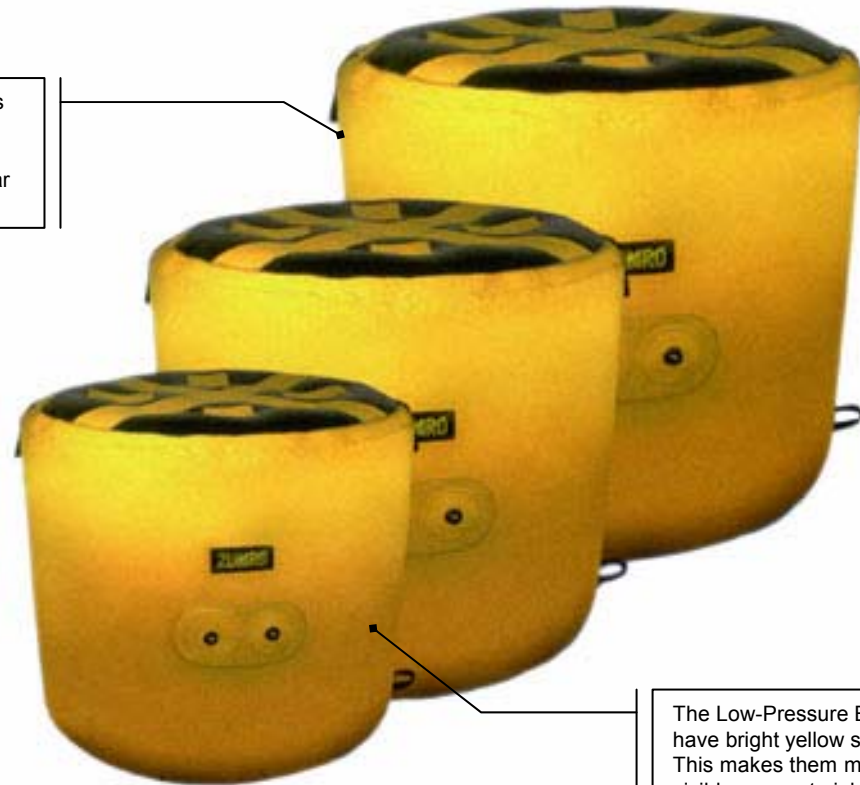

The Low-Pressure Bags have bright yellow sides. This makes them more visible, even at night.

LP bag-series

Technical specifications LP bag series

Type	A	B	C	D
Diameter	61	76	91	122
Lift at max. pressure (kg)	1.488	2.325	3.347	5.951
Max. Pressure (Bar)	0,5	0,5	0,5	0,5
Height inflated (cm)	43	59	61	100
Height deflated (cm)	5	5	5	10
Air requirement (ltr)	222	450	673	1.900
Weight packed twin set (kg)	30	34	45	50

All necessary accessories like controllers, regulators and hoses are available and can be provided in sets depending on the specific needs.

DOCNUMBER