

# NT2

Rescue teams all over the world are replacing their lifting equipment with the NTbags, as their unmatched performance, rapid and easy deployment make them capable to handle normal incidents fast but more importantly beat an situation that may otherwise escalate to a disaster. Beat the unexpected by changing the way you, and your department look at lifting and confined space rescue.

NT-series have become the standard in lifting and creating space between structures, as they provide the answer to the limitations and drawbacks of *conventional high and low pressure bags* you face with your current lifting tools. High performance but easy to deploy you will use them every change you get.

Unparalleled performance: a lifting capacity that is over 600% more than your current bags at full height

True connect ability: to reach almost any desired height

Rapid and easy deployment: with total control

True versatility: tremendous lifting height, stability and the ability to lift pointed loads

Maximum safety: highest safety factor and the ability to be repaired after a puncture

Multi purpose: the best features of both traditional low and high-pressure bags in one system

Low operation costs: do the same with half the amount of bags

Professional training: professional training cd-rom to help you to utilize them best

## NT: The new standard for pneumatic lifting heavy structures

**Point loading:** point load plate can be used for lifting pointed objects



**Grip handles:** to easily carry and position the bag

**Round form:** no stress points, so less risk



**Hard cover:** lift stable due to flat surface

### Facts NTBags:

23 tons lifting capacity  
Easily lift up to 2286 mm height  
Lift directly on pointed surfaces  
Minimum insertion height  
Connectable for stable lifting  
Low weight  
> 4:1 safety

**Connectable:** to reach desired height with the use of connectors

**Super strong aramid fibers:** 7x stronger than steel fibers




All needed variants: 23, 58, and 132 tons

NT bag will be delivered with an easy storage case to enhance lifespan and optimal storage

## Technical specifications NT2

Model	NT2
Max. Lifting Capacity	51,000 lbs / 25 US ton / 23 ton
Weight	16 lb / 7 kg
Lifting Height	n x 10 13/16" / 275 mm ( n = Number of stacked bags)
Min. height centre (b)	1 12/16" / 45 mm
Min. height edge (a)	6/16" / 10 mm
Min. Diameter inflated	15 15/16" / 405 mm
Max. Diameter deflated	20 8/16" / 520 mm
Working Pressure	145 PSI / 10 Bar
Safety Factor	>4
Water Volume	5,8 gal / 22 ltr
Max. Air Volume	63,9 gal at 145 PSI / 242 ltr at 10 Bar
RWTÜV 44	Compliant

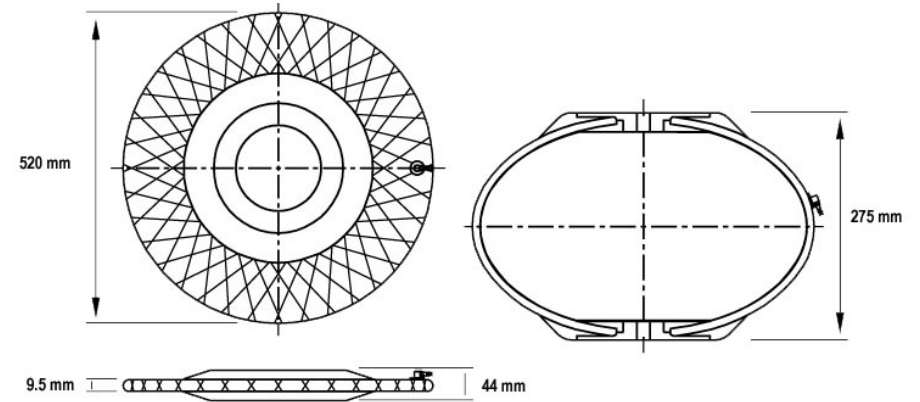

For questions or additional information please e-mail to [info@resqtec.pl](mailto:info@resqtec.pl) / [info@ratownictwo.com.pl](mailto:info@ratownictwo.com.pl)